


- Drawing Notes:**
- All dimensions are shown in metres unless noted otherwise.
 - Do not scale from this drawing.
 - This drawing is indicative only and the site layout is likely to change as more information becomes available.
 - All levels are in metres above ordnance datum (AOD).
 - Please read in conjunction with drawing 005.3.1 for Equipment Structure Levels
 - TLR = Transformer Level Reference, BLR = Battery Level Reference

REV	DATE	DESCRIPTION	BY	CHKD
4	17.12.2024	Minor amend to note	EW	JH
3	12.11.2024	Aux Transformer & LV cabinet detail amended	EW	JH
2	30.08.2024	Site layout and annotations amended.	JH	RS
1	07.06.2024	Levels amended in line with latest site layout. Page name change.	EW	JH
0	09.04.2024	Equipment end Structure Levels - Original	JH	EW

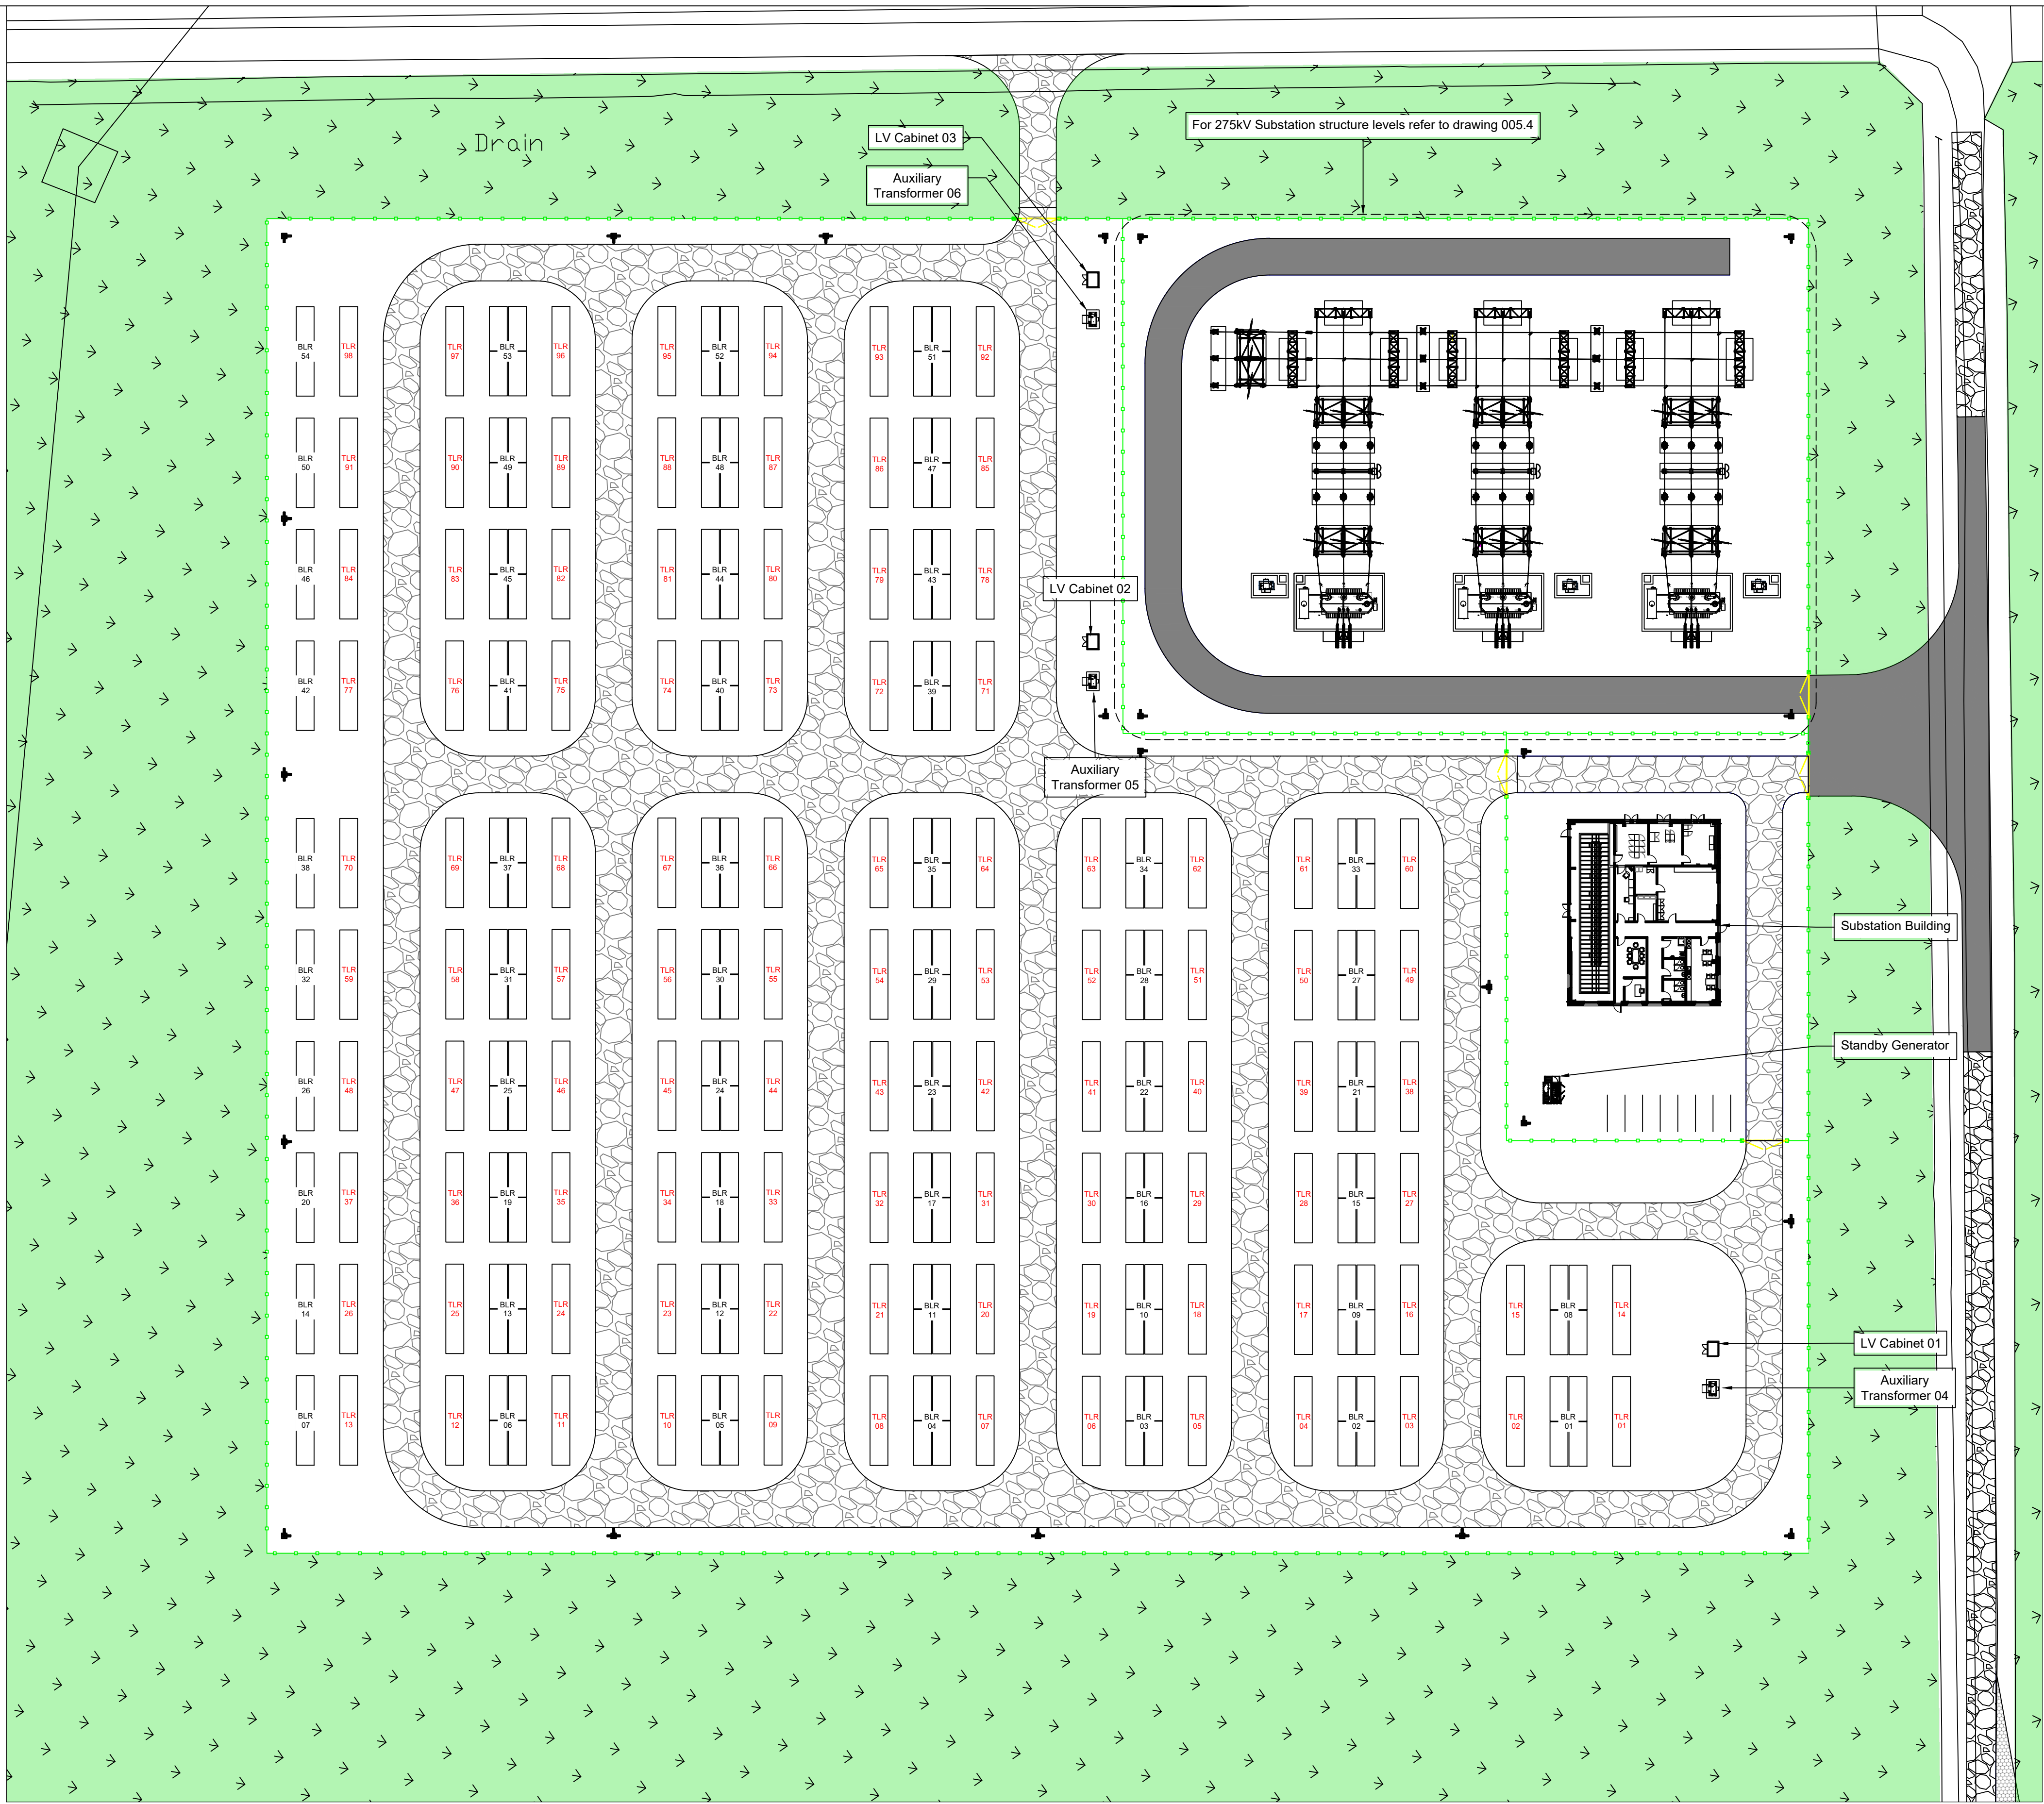

Field
Fora - Montacute Yards
186 Shoreditch High Street
London
E1 6HU

PROJECT	Spittal			
TITLE	Equipment and Structure Levels Plan			
DISCIPLINE	DESIGN			
DRAWING STATUS	FOR INFORMATION			
SCALE	DATE	DRAWN BY	CHECKED BY	APPROVED BY
1:500 @A1	09.04.2024	JH	EW	JM
PROJECT NO.	DRAWING NO.		REV.	
BTGBSP01	005.3		04	

Battery Levels		
Battery Level Reference	Finished Floor Level (m)	Top of Battery (m)
01	94.160	97.060
02	93.870	96.770
03	93.580	96.480
04	92.700	95.600
05	91.690	94.590
06	90.680	93.580
07	89.670	92.570
08	94.080	96.980
09	93.790	96.690
10	93.510	96.410
11	92.630	95.530
12	91.620	94.520
13	90.600	93.500
14	89.590	92.490
15	93.720	96.620
16	93.430	96.330
17	92.550	95.450
18	91.540	94.440
19	90.530	93.430
20	89.520	92.420
21	93.640	96.540
22	93.350	96.250
23	92.480	95.380
24	91.470	94.370
25	90.450	93.350
26	89.440	92.340
27	93.570	96.470
28	93.280	96.180
29	92.400	95.300
30	91.390	94.290
31	90.380	93.280
32	89.370	92.270
33	93.490	96.390
34	93.200	96.100
35	92.320	95.220
36	91.310	94.210
37	90.300	93.200
38	89.290	92.190
39	92.200	95.100
40	91.190	94.090
41	90.180	93.080
42	89.170	92.070
43	92.130	95.030
44	91.120	94.020
45	90.100	93.000
46	89.090	91.990
47	92.050	94.950
48	91.040	93.940
49	90.030	92.930
50	89.020	91.920
51	91.980	94.880
52	90.970	93.870
53	89.960	92.860
54	88.940	91.840

Transformer Skid Levels		
Transformer Skid Reference	Finished Floor Level (m)	Top of Transformer Skid (m)
01	94.220	97.530
02	94.070	97.380
03	93.930	97.240
04	93.780	97.090
05	93.640	96.950
06	93.420	96.730
07	92.910	96.220
08	92.400	95.710
09	91.900	95.210
10	91.390	94.700
11	90.890	94.200
12	90.380	93.690
13	89.870	93.180
14	94.140	97.450
15	94.000	97.310
16	93.850	97.160
17	93.710	97.020
18	93.560	96.870
19	93.340	96.650
20	92.840	96.150
21	92.330	95.640
22	91.820	95.130
23	91.320	94.630
24	90.810	94.120
25	90.310	93.620
26	89.800	93.110
27	93.780	97.090
28	93.630	96.940
29	93.490	96.800
30	93.270	96.580
31	92.760	96.070
32	92.250	95.560
33	91.750	95.060
34	91.240	94.550
35	90.740	94.050
36	90.230	93.540
37	89.720	93.030
38	93.700	97.010
39	93.560	96.870
40	93.410	96.720
41	93.190	96.500
42	92.680	95.990
43	92.180	95.490
44	91.670	94.980
45	91.170	94.480
46	90.660	93.970
47	90.160	93.470
48	89.650	92.960
49	93.630	96.940
50	93.480	96.790
51	93.340	96.650
52	93.110	96.420
53	92.610	95.920
54	92.100	95.410
55	91.600	94.910
56	91.090	94.400
57	90.590	93.900
58	90.080	93.390
59	89.570	92.880

Transformer Skid Levels		
Transformer Skid Reference	Finished Floor Level (m)	Top of Transformer Skid (m)
60	93.550	96.860
61	93.410	96.720
62	93.260	96.570
63	93.040	96.350
64	92.530	95.840
65	92.030	95.340
66	91.520	94.830
67	91.020	94.330
68	90.510	93.820
69	90.000	93.310
70	89.500	92.810
71	92.410	95.720
72	91.910	95.220
73	91.400	94.710
74	90.900	94.210
75	90.390	93.700
76	89.880	93.190
77	89.380	92.690
78	92.340	95.650
79	91.830	95.140
80	91.330	94.640
81	90.820	94.130
82	90.310	93.620
83	89.810	93.120
84	89.300	92.610
85	92.260	95.570
86	91.760	95.070
87	91.250	94.560
88	90.740	94.050
89	90.240	93.550
90	89.730	93.040
91	89.230	92.540
92	92.190	95.500
93	91.680	94.990
94	91.180	94.490
95	90.670	93.980
96	90.160	93.470
97	89.660	92.970
98	89.150	92.460

Misc. Equipment Levels		
Equipment Reference	Finished Floor Level (m)	Top of Equipment (m)
Substation Building	94.030	98.650
Standby Generator	93.880	96.080
Auxiliary Transformer 04	94.300	96.700
Auxiliary Transformer 05	92.900	95.300
Auxiliary Transformer 06	92.650	95.050
LV Cabinet 01	92.610	94.610
LV Cabinet 02	92.360	94.360
LV Cabinet 03	89.400	91.400

- Drawing Notes:**
- All levels are in metres above ordnance datum (AOD).
 - Please read in conjunction with drawing 005.3 for Equipment Structure Levels Plan

3	12.11.2024	Levels updated	EW	JH
2	30.08.2024	Equipment levels updated	JH	RS
1	23.07.2024	Top of substation building level amended	JH	JH
0	07.06.2024	Equipment and Structure Levels Tables - Original	EW	JH
REV	DATE	DESCRIPTION	BY	CHKD
 Field Fora - Montacute Yards 186 Shoreditch High Street London E1 6HU				
PROJECT Spittal				
TITLE Equipment and Structure Levels Tables				
DISCIPLINE DESIGN				
DRAWING STATUS FOR INFORMATION				
SCALE N/A	DATE 07.06.2024	DRAWN BY EW	CHECKED BY JH	APPROVED BY JM
PROJECT NO. BTGBSP101		DRAWING NO. 005.3.1		REV. 03